

Distanzrohr KDR-xx-xxx



gehärtet, Härte 60 - 62 HRC

Sondermaße:

Sondermaße auf Anfrage


Bestellbeispiel:

Distanzrohr: **KDR**

Abmessung: d2 = 19: **19**

Länge: l = 63: **063**

Bestellnummer: **KDR-19-063**

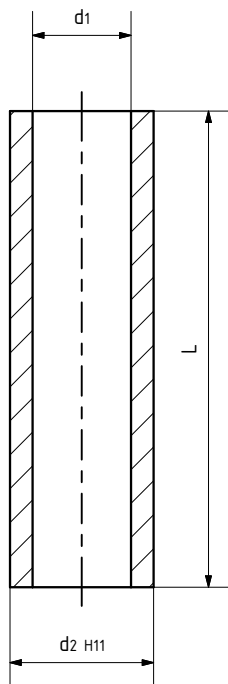

Längentoleranz:

L 20 - 80 = ± 0,1

L 80 - 125 = ± 0,15

L 125 - 200 = ± 0,2

d1	d2 H11	L	Pack- ungs- einheit	Ergänzung für Bestell- Nr.
7	10	20	30	10x020
		30	30	10x030
		40	30	10x040
		50	30	10x050
		63	20	10x063
		80	20	10x080
9	12,5	20	30	12x020
		30	30	12x030
		40	30	12x040
		50	30	12x050
		63	20	12x063
		80	20	12x080
		100	20	12x100
9	13	20	30	13x020
		30	30	13x030
		40	30	13x040
		50	30	13x050
		63	20	13x063
		80	20	13x080
		100	20	13x100
11	16	30	20	16x030
		40	20	16x040
		50	20	16x050
		60	20	16x060
		63	20	16x063
		80	15	16x080
		100	15	16x100
		125	15	16x125
		160	10	16x160
		200	10	16x200
13	19	30	20	19x030
		40	20	19x040
		50	20	19x050
		60	20	19x060
		63	20	19x063
		80	15	19x080
		100	15	19x100
		125	15	19x125
		150	10	19x150
		200	10	19x200

d1	d2 H11	L	Pack- ungs- einheit	Ergänzung für Bestell- Nr.
13	20	30	20	20x030
		40	20	20x040
		50	20	20x050
		60	20	20x060
		63	20	20x063
		80	15	20x080
		100	15	20x100
		125	15	20x125
		150	10	20x150
		200	10	20x200
17	25	50	10	25x050
		60	10	25x060
		63	10	25x063
		70	10	25x070
		80	10	25x080
		90	10	25x090
		100	10	25x100
		125	10	25x125
		150	10	25x150
		200	10	25x200
22	30	70	10	30x070
		80	10	30x080
		90	10	30x090
		100	10	30x100
		120	10	30x120
		125	10	30x125
		150	10	30x150
		200	10	30x200
26	36	80	10	36x080
		100	10	36x100
		125	10	36x125
		150	10	36x150
		200	10	36x200